


PMS

Panel Mount Power Supply

PMS-□V1K2W1BTD

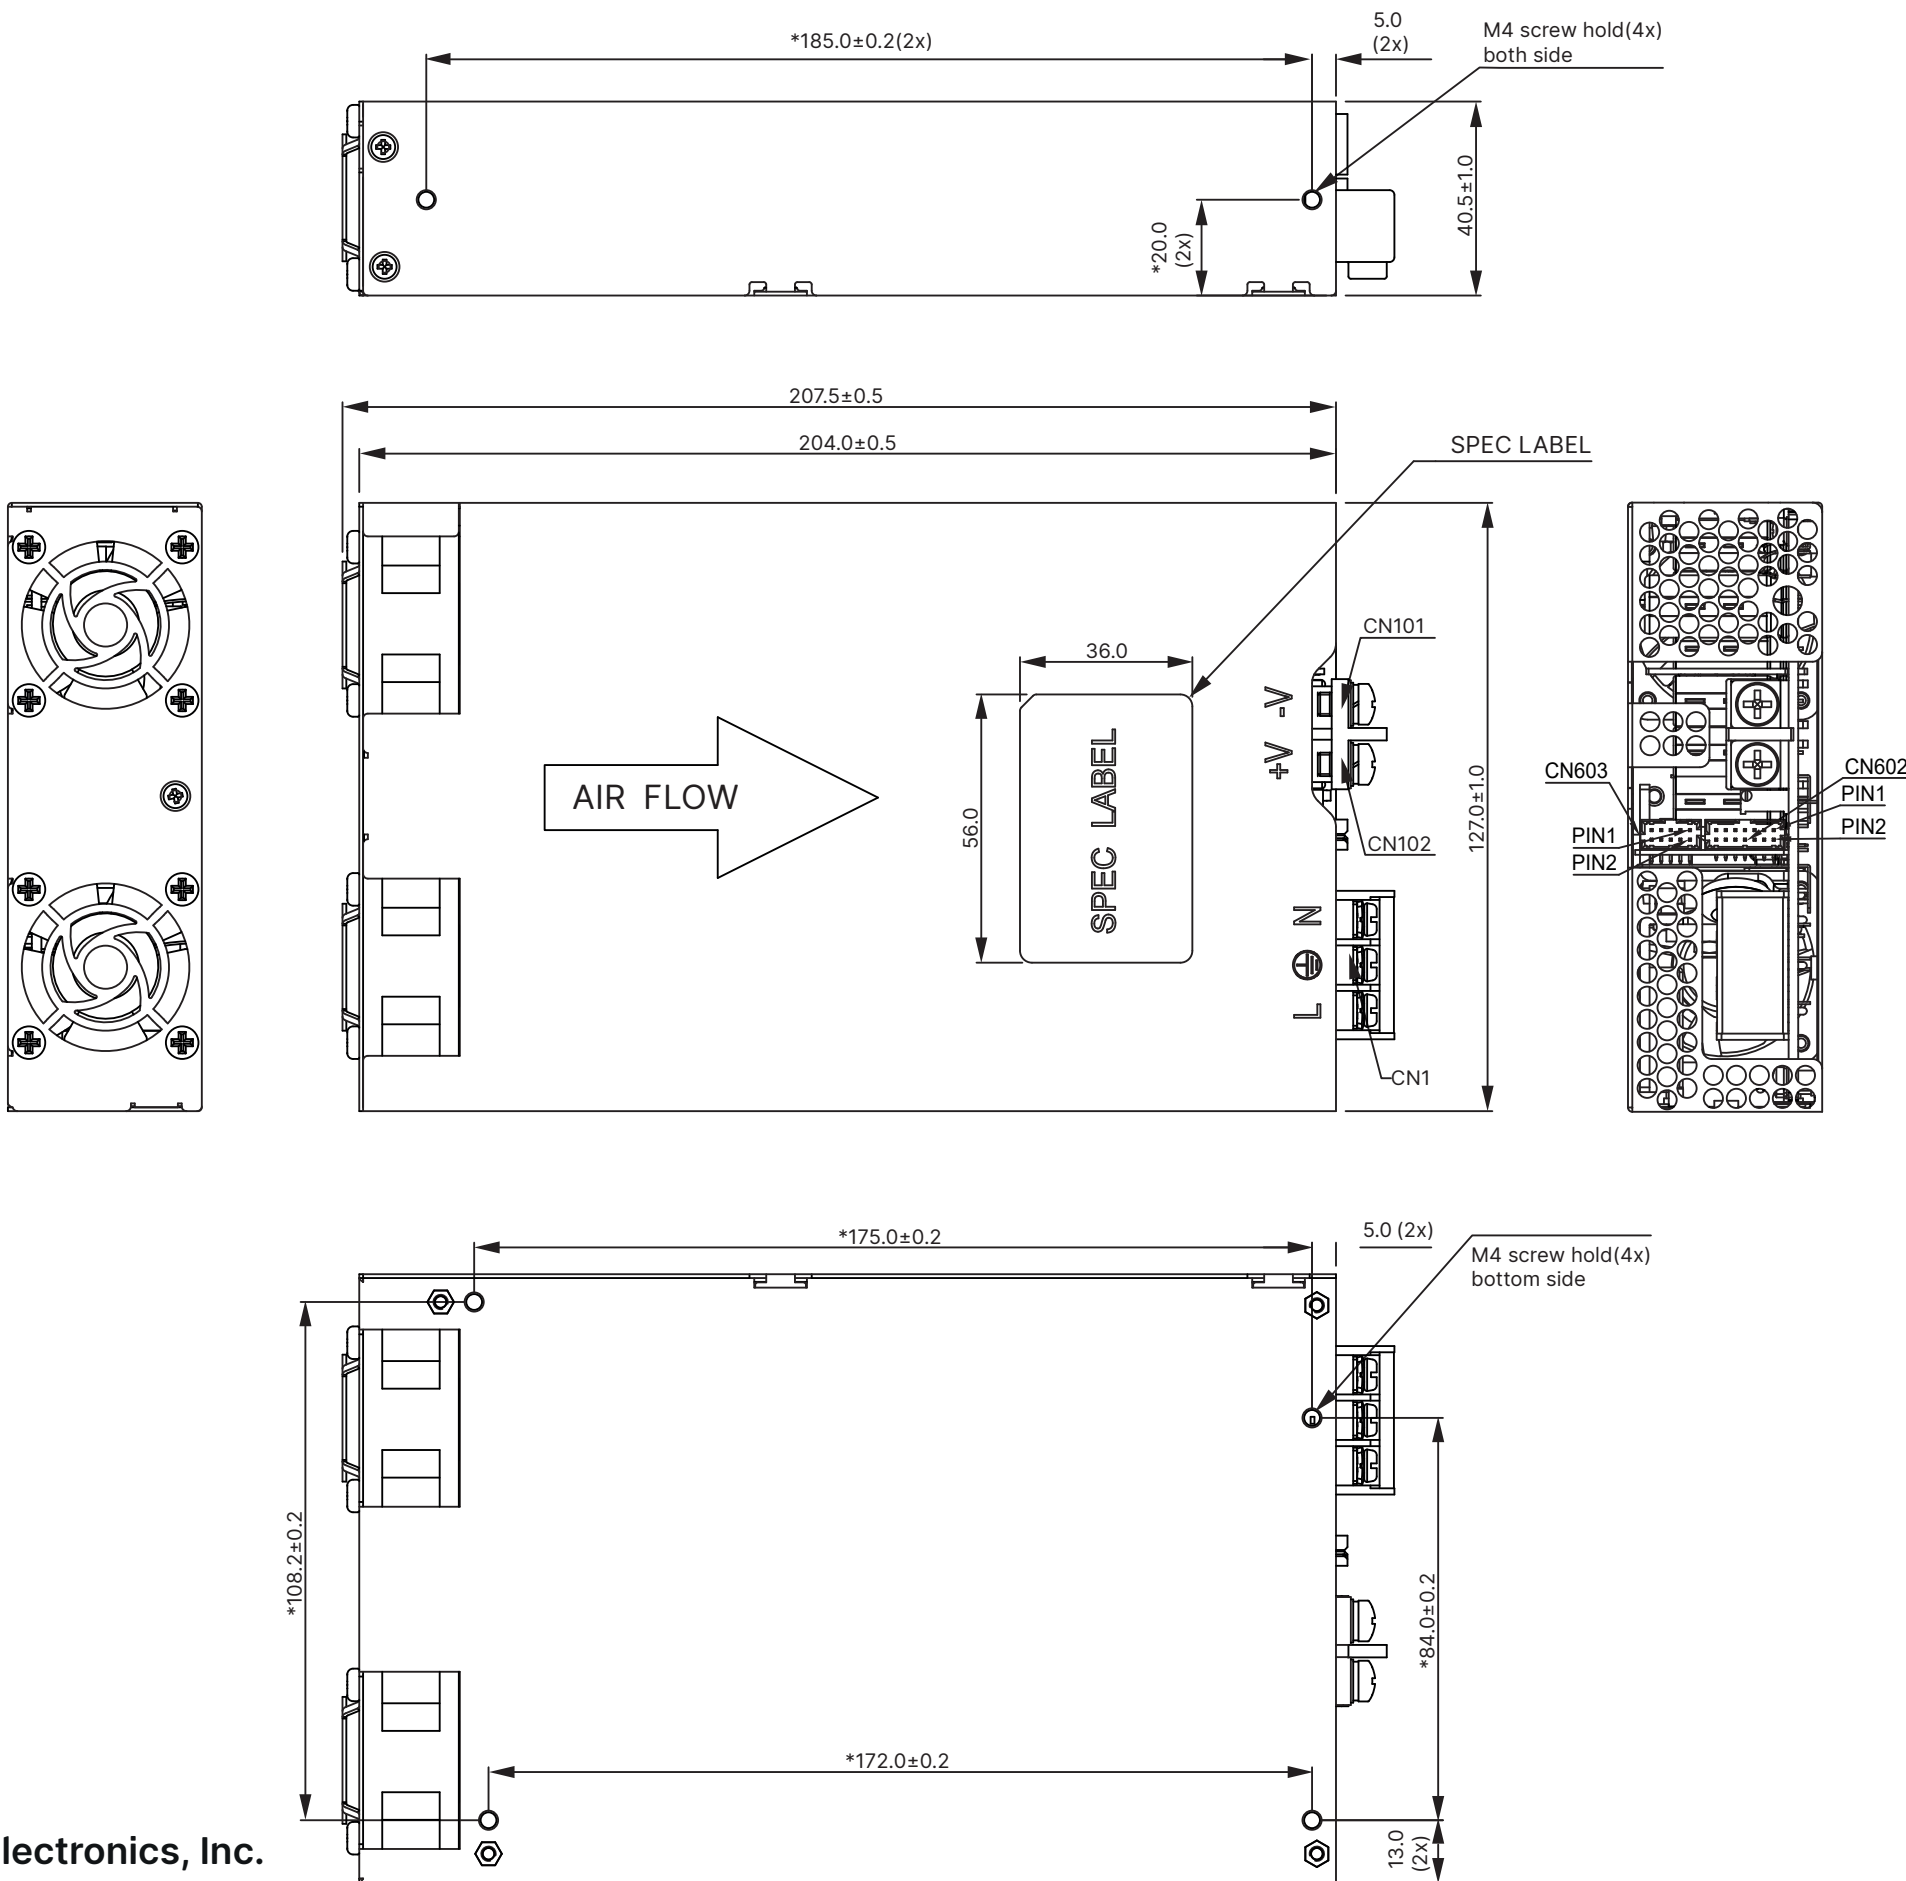

PIN ASSIGNMENTS TABLE:

ITEM	PIN NO.	FUNCTION	REMARK
CN1 (INPUT CONNECTOR)	1	Neutral	ANYTEK:YK50A (SCREW: M3.5, ZINC PLATED)
	2	Ground	
	3	Line	
CN101 (OUTPUT CONNECTOR)	1	DC RTN	SCREW: M5x0.8
CN102 (OUTPUT CONNECTOR)	1	Vo	
CN603 (CONTROL CONNECTOR)	1	5V bus for I ² C	MOLEX:87833-1051 MATING WITH MOLEX:51110-1051 TERMINAL:0503948052
	2	DC RTN of 5V bus for I ² C	
	3	Serial data signal (SDA)	
	4	Serial clock signal (SCL)	
	5	NC	
	6	NC	
	7	Address bit 0 (A0)	
	8	Address bit 1 (A1)	
	9	Address bit 2 (A2)	
	10	NC	
CN602 (CONTROL CONNECTOR)	1	Remote On_Off/Inhibit +	MOLEX:87833-7420 MATING WITH MOLEX:51110-1451 TERMINAL:0503948052
	2	Remote On_Off/Inhibit -	
	3	Power Good-	
	4	Power Good+	
	5	NC	
	6	NC	
	7	5V Standby Output +	
	8	5V Standby Output +	
	9	DC RTN	
	10	DC RTN	
	11	Remote Sense +	
	12	Remote Sense -	
	13	Current Share	
	14	DC RTN	

Notes:

1. The dimensions with “*” mark must be inspected and controlled by IQC.
2. The color of spec label is silver and the color of words printed on label is black.

