



1 2 3 4

A

B

C


INPUT  
LINE (BLACK)  
NEUTRAL (WHITE)

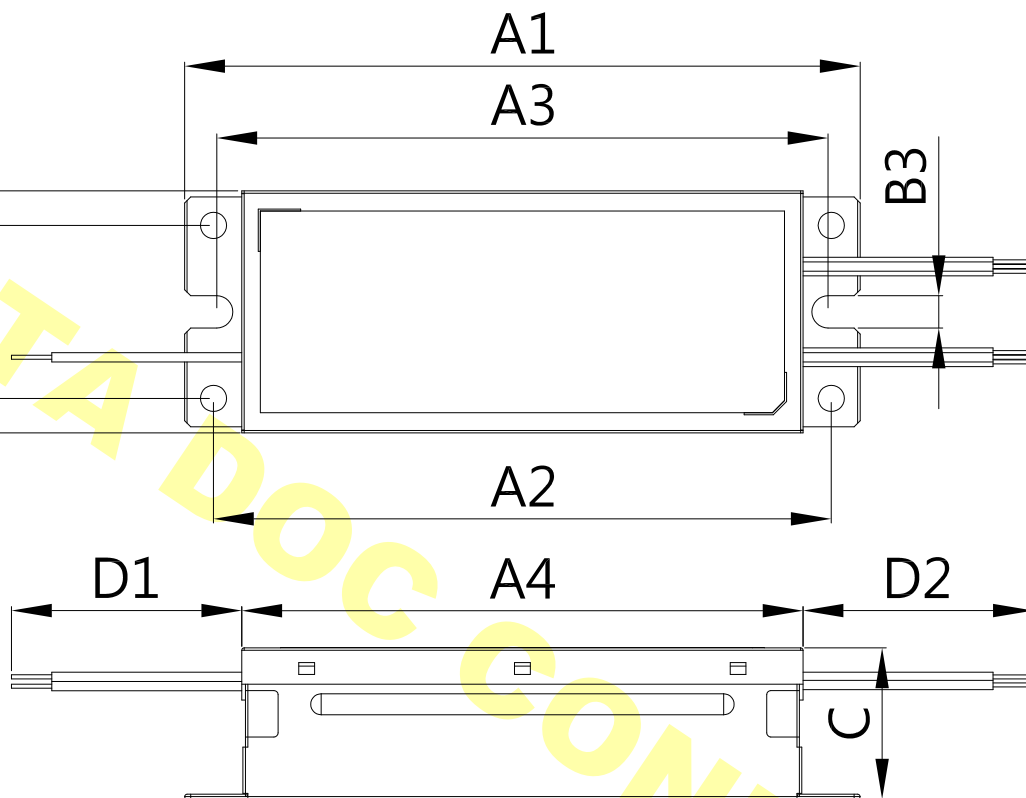

OUTPUT

+12V (BLACK/WHITE)  
DIM+ (PURPLE)  
DIM- (GRAY)

NTC/PRG (BLACK)  
POSITIVE (BROWN)  
NEGATIVE (BLUE)





A

B

C

A1: 167.5±1 mm  
A2: 153.2±1 mm  
A3: 151.6±1 mm  
A4: 139.2±1 mm  
B1: 60±1 mm  
B2: 42.9±1 mm  
B3: 8±1 mm  
C: 37.5±1 mm  
D1: 300±25 mm  
D2: 300±25 mm

USED ON:USCI-075140GA  
USED ON:USCI-100140GA

 <b>台達電子工業股份有限公司</b> DELTA ELECTRONICS, INC.		Design: <b>李瑞清</b> 02/14'17	Check: <b>陳鐸</b> 02/14'17																																									
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.</p>		 FIRST ANGLE PROJECTION	Description:  <b>PHYSICAL DIMENSIONS</b>																																									
<p><b>DIMENSIONAL TOLERANCES</b></p> <table><tr><td>( )</td><td></td><td></td><td></td><td>HOLES : ±0.05</td><td>ANGLES : ±0.5°</td><td></td><td></td></tr><tr><td>&lt;30</td><td>: ±0.25</td><td>DECIMALS</td><td>UP-100 : ±0.2</td><td>250-300 : ±0.4</td><td>UP-600 : ±1.5</td><td></td><td></td></tr><tr><td>&gt;30-100</td><td>: ±0.35</td><td>X : ±0.3</td><td>100-150 : ±0.25</td><td>300-350 : ±0.45</td><td>600-900 : ±2.4</td><td></td><td></td></tr><tr><td>&gt;100-300</td><td>: ±0.5</td><td>XX : ±0.2</td><td>150-200 : ±0.3</td><td>350-400 : ±0.5</td><td>900-OVER : ±3.1</td><td></td><td></td></tr><tr><td>ABOVE 300</td><td>: ±0.6</td><td>XXX : ±0.1</td><td>200-250 : ±0.35</td><td></td><td></td><td></td><td></td></tr></table>		( )				HOLES : ±0.05	ANGLES : ±0.5°			<30	: ±0.25	DECIMALS	UP-100 : ±0.2	250-300 : ±0.4	UP-600 : ±1.5			>30-100	: ±0.35	X : ±0.3	100-150 : ±0.25	300-350 : ±0.45	600-900 : ±2.4			>100-300	: ±0.5	XX : ±0.2	150-200 : ±0.3	350-400 : ±0.5	900-OVER : ±3.1			ABOVE 300	: ±0.6	XXX : ±0.1	200-250 : ±0.35					<b>A4</b>  SIZE	Part No.  <b>PD-USCI-XXX140GA</b>	REV.  <b>00</b>
( )				HOLES : ±0.05	ANGLES : ±0.5°																																							
<30	: ±0.25	DECIMALS	UP-100 : ±0.2	250-300 : ±0.4	UP-600 : ±1.5																																							
>30-100	: ±0.35	X : ±0.3	100-150 : ±0.25	300-350 : ±0.45	600-900 : ±2.4																																							
>100-300	: ±0.5	XX : ±0.2	150-200 : ±0.3	350-400 : ±0.5	900-OVER : ±3.1																																							
ABOVE 300	: ±0.6	XXX : ±0.1	200-250 : ±0.35																																									
SCALE	UNIT	mm	USED ON	USCI-XXX140GA																																								
SHEET 2 OF 2		ISSUE DATE: 02/14'17																																										